

## Information sheet (Lot.10)

This information includes the results of calculation of the seasonal energy consumption and efficiency for air conditioner in regards to ErP pursuant to the Commission Regulation(EU) No.206/2012 and No.626/2011.

Information to identify the model(s) to which the information relates to:

TYPE : AIR CONDITIONER  
 : SINGLE SPLIT  
 : WALL MOUNTED  
 Indoor unit(s) : ASYG09LMCB  
 Outdoor unit : AOYG09LMCBN  
 BRAND : FUJITSU

N/A = Not Applicable

Function			
Cooling	Yes	Average	Yes
Heating	Yes	Warmer	No
		Colder	No

Design load				Seasonal efficiency			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Cooling	Pdesignc	2.5	kW	Cooling	SEER	6.50	-
Heating/Average	Pdesignh	3.0	kW	Heating/Average	SCOP/A	4.10	-
Heating/Warmer	Pdesignh	N/A	kW	Heating/Warmer	SCOP/W	N/A	-
Heating/Colder	Pdesignh	N/A	kW	Heating/Colder	SCOP/C	N/A	-

Cooling							
Declared capacity for cooling, at indoor temperature 27 (19) °C and outdoor temperature Tj				Declared energy efficiency ratio, at indoor temperature 27 (19) °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = 35°C	Pdc	2.50	kW	Tj = 35°C	EER d	3.97	-
Tj = 30°C	Pdc	1.84	kW	Tj = 30°C	EER d	5.90	-
Tj = 25°C	Pdc	1.60	kW	Tj = 25°C	EER d	8.93	-
Tj = 20°C	Pdc	1.72	kW	Tj = 20°C	EER d	11.60	-

Heating/Average							
Declared capacity for heating/Average season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Average season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = -7°C	Pdh	2.65	kW	Tj = -7°C	COPd	2.33	-
Tj = 2°C	Pdh	1.62	kW	Tj = 2°C	COPd	4.30	-
Tj = 7°C	Pdh	1.49	kW	Tj = 7°C	COPd	5.68	-
Tj = 12°C	Pdh	1.81	kW	Tj = 12°C	COPd	6.55	-
Tj = bivalent temperature	Pdh	3.00	kW	Tj = bivalent temperature	COPd	2.26	-
Tj = operating limit	Pdh	2.15	kW	Tj = operating limit	COPd	1.60	-

Heating/Warmer							
Declared capacity for heating/Warmer season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Warmer season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = 2°C	Pdh	N/A	kW	Tj = 2°C	COPd	N/A	-
Tj = 7°C	Pdh	N/A	kW	Tj = 7°C	COPd	N/A	-
Tj = 12°C	Pdh	N/A	kW	Tj = 12°C	COPd	N/A	-
Tj = bivalent temperature	Pdh	N/A	kW	Tj = bivalent temperature	COPd	N/A	-
Tj = operating limit	Pdh	N/A	kW	Tj = operating limit	COPd	N/A	-

Heating/Colder							
Declared capacity for heating/Colder season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Colder season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = -7°C	Pdh	N/A	kW	Tj = -7°C	COPd	N/A	-
Tj = 2°C	Pdh	N/A	kW	Tj = 2°C	COPd	N/A	-
Tj = 7°C	Pdh	N/A	kW	Tj = 7°C	COP d	N/A	-
Tj = 12°C	Pdh	N/A	kW	Tj = 12°C	COP d	N/A	-
Tj = bivalent temperature	Pdh	N/A	kW	Tj = bivalent temperature	COP d	N/A	-
Tj = operating limit	Pdh	N/A	kW	Tj = operating limit	COP d	N/A	-
Tj=-15°C	Pdh	N/A	kW	Tj = -15°C	COP d	N/A	-

Bivalent temperature				Operating limit temperature			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Heating/Average	T <sub>biv</sub>	-10	°C	Heating/Average	T <sub>ol</sub>	-25	°C
Heating/Warmer	T <sub>biv</sub>	N/A	°C	Heating/Warmer	T <sub>ol</sub>	N/A	°C
Heating/Colder	T <sub>biv</sub>	N/A	°C	Heating/Colder	T <sub>ol</sub>	N/A	°C

Cycling interval capacity				Cycling interval efficiency			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
For cooling	P <sub>cycc</sub>	N/A	kW	For cooling	EER <sub>cycc</sub>	N/A	-
For heating	P <sub>cyhc</sub>	N/A	kW	For heating	COP <sub>cyhc</sub>	N/A	-
Degradation coefficient cooling	C <sub>dc</sub>	0.25	-	Degradation coefficient heating	C <sub>dh</sub>	0.25	-

Electric power input in power modes other than 'active mode'				Annual electricity consumption			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Off mode (Cooling/Heating)	P <sub>OFF</sub>	7.0/7.0	W	Cooling	Q <sub>CE</sub>	135	kWh/a
Standby mode (Cooling/Heating)	P <sub>SB</sub>	7.0/7.0	W	Heating/Average	Q <sub>HE</sub>	1024	kWh/a
Thermostat-off mode (Cooling/Heating)	P <sub>TO</sub>	1.0/6.0	W	Heating/Warmer	Q <sub>HE</sub>	N/A	kWh/a
Crankcase heater mode (Cooling/Heating)	P <sub>CK</sub>	0.0/24.0	W	Heating/Colder	Q <sub>HE</sub>	N/A	kWh/a

Capacity control		Other items			
Item	Y/N	Item	Symbol	Value	Unit
Fixed	No	Sound power level (Indoor/Outdoor)	L <sub>WA</sub>	59.0/63.0	dB(A)
Staged	No	Global warming potential	GWPP	1975	kgCO <sub>2</sub> eq.
Variable	Yes	Rated air flow (Indoor/Outdoor)	-	750/2020	m <sup>3</sup> /h

Contact details for obtaining more information	FUJITSU GENERAL LIMITED 1116, Suenaga, Takatsu-ku, Kawasaki, 213-8502, Japan
--	---

V20121214




**ENERG**  
енергия · ενέργεια

Y IJA  
IE IA

**FUJITSU**

AOYG09LMCBN/ASYG09LMCB

SEER

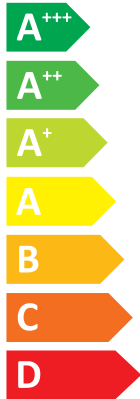

**A<sup>++</sup>**

kW 2,5  
SEER 6,5  
kWh/annum 135

SCOP



**A<sup>+</sup>**

kW	X	3,0	X
SCOP	X	4,1	X
kWh/annum	X	1024	X



**59dB**



**63dB**



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI  
626/2011

9332938623

## Information sheet (Lot.10)

This information includes the results of calculation of the seasonal energy consumption and efficiency for air conditioner in regards to ErP pursuant to the Commission Regulation(EU) No.206/2012 and No.626/2011.

Information to identify the model(s) to which the information relates to:

TYPE : AIR CONDITIONER  
 : SINGLE SPLIT  
 : WALL MOUNTED  
 Indoor unit(s) : ASYG12LMCB  
 Outdoor unit : AOYG12LMCBN  
 BRAND : FUJITSU

N/A = Not Applicable

Function			
Cooling	Yes	Average	Yes
Heating	Yes	Warmer	No
		Colder	No

Design load				Seasonal efficiency			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Cooling	Pdesignc	3.4	kW	Cooling	SEER	6.90	-
Heating/Average	Pdesignh	3.6	kW	Heating/Average	SCOP/A	4.10	-
Heating/Warmer	Pdesignh	N/A	kW	Heating/Warmer	SCOP/W	N/A	-
Heating/Colder	Pdesignh	N/A	kW	Heating/Colder	SCOP/C	N/A	-

Cooling				Cooling			
Declared capacity for cooling, at indoor temperature 27 (19) °C and outdoor temperature Tj				Declared energy efficiency ratio, at indoor temperature 27 (19) °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = 35°C	Pdc	3.40	kW	Tj = 35°C	EER d	3.68	-
Tj = 30°C	Pdc	2.51	kW	Tj = 30°C	EER d	5.62	-
Tj = 25°C	Pdc	1.72	kW	Tj = 25°C	EER d	9.07	-
Tj = 20°C	Pdc	1.74	kW	Tj = 20°C	EER d	12.69	-

Heating/Average				Heating/Average			
Declared capacity for heating/Average season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Average season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = -7°C	Pdh	3.18	kW	Tj = -7°C	COPd	2.26	-
Tj = 2°C	Pdh	1.94	kW	Tj = 2°C	COPd	4.22	-
Tj = 7°C	Pdh	1.58	kW	Tj = 7°C	COPd	5.85	-
Tj = 12°C	Pdh	1.85	kW	Tj = 12°C	COPd	6.61	-
Tj = bivalent temperature	Pdh	3.60	kW	Tj = bivalent temperature	COPd	2.24	-
Tj = operating limit	Pdh	2.29	kW	Tj = operating limit	COPd	1.65	-

Heating/Warmer				Heating/Warmer			
Declared capacity for heating/Warmer season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Warmer season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = 2°C	Pdh	N/A	kW	Tj = 2°C	COPd	N/A	-
Tj = 7°C	Pdh	N/A	kW	Tj = 7°C	COPd	N/A	-
Tj = 12°C	Pdh	N/A	kW	Tj = 12°C	COPd	N/A	-
Tj = bivalent temperature	Pdh	N/A	kW	Tj = bivalent temperature	COPd	N/A	-
Tj = operating limit	Pdh	N/A	kW	Tj = operating limit	COPd	N/A	-

Heating/Colder				Heating/Colder			
Declared capacity for heating/Colder season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Colder season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = -7°C	Pdh	N/A	kW	Tj = -7°C	COPd	N/A	-
Tj = 2°C	Pdh	N/A	kW	Tj = 2°C	COPd	N/A	-
Tj = 7°C	Pdh	N/A	kW	Tj = 7°C	COP d	N/A	-
Tj = 12°C	Pdh	N/A	kW	Tj = 12°C	COP d	N/A	-
Tj = bivalent temperature	Pdh	N/A	kW	Tj = bivalent temperature	COP d	N/A	-
Tj = operating limit	Pdh	N/A	kW	Tj = operating limit	COP d	N/A	-
Tj=-15°C	Pdh	N/A	kW	Tj = -15°C	COP d	N/A	-

Bivalent temperature				Operating limit temperature			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Heating/Average	T <sub>biv</sub>	-10	°C	Heating/Average	T <sub>ol</sub>	-25	°C
Heating/Warmer	T <sub>biv</sub>	N/A	°C	Heating/Warmer	T <sub>ol</sub>	N/A	°C
Heating/Colder	T <sub>biv</sub>	N/A	°C	Heating/Colder	T <sub>ol</sub>	N/A	°C

Cycling interval capacity				Cycling interval efficiency			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
For cooling	P <sub>cycc</sub>	N/A	kW	For cooling	EER <sub>cycc</sub>	N/A	-
For heating	P <sub>cyhc</sub>	N/A	kW	For heating	COP <sub>cyhc</sub>	N/A	-
Degradation coefficient cooling	C <sub>dc</sub>	0.25	-	Degradation coefficient heating	C <sub>dh</sub>	0.25	-

Electric power input in power modes other than 'active mode'				Annual electricity consumption			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Off mode (Cooling/Heating)	P <sub>OFF</sub>	7.0/7.0	W	Cooling	Q <sub>CE</sub>	173	kWh/a
Standby mode (Cooling/Heating)	P <sub>SB</sub>	7.0/7.0	W	Heating/Average	Q <sub>HE</sub>	1230	kWh/a
Thermostat-off mode (Cooling/Heating)	P <sub>TO</sub>	2.0/6.0	W	Heating/Warmer	Q <sub>HE</sub>	N/A	kWh/a
Crankcase heater mode (Cooling/Heating)	P <sub>CK</sub>	0.0/24.0	W	Heating/Colder	Q <sub>HE</sub>	N/A	kWh/a

Capacity control		Other items			
Item	Y/N	Item	Symbol	Value	Unit
Fixed	No	Sound power level (Indoor/Outdoor)	L <sub>WA</sub>	59.0/65.0	dB(A)
Staged	No	Global warming potential	GWPP	1975	kgCO <sub>2</sub> eq.
Variable	Yes	Rated air flow (Indoor/Outdoor)	-	750/1950	m <sup>3</sup> /h

Contact details for obtaining more information	FUJITSU GENERAL LIMITED 1116, Suenaga, Takatsu-ku, Kawasaki, 213-8502, Japan
--	---

V20121214



# ENERG


енергия · ενέργεια



## FUJITSU

AOYG12LMCBN/ASYG12LMCB


SEER

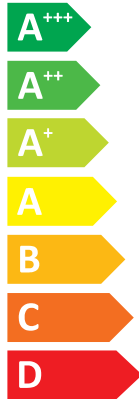

**A<sup>++</sup>**

kW **3,4**  
 SEER **6,9**  
 kWh/annum **173**

SCOP

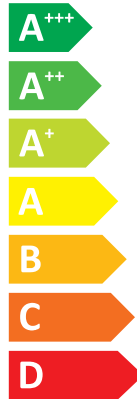

**A<sup>+</sup>**

kW	X	<b>3,6</b>	X
SCOP	X	<b>4,1</b>	X
kWh/annum	X	<b>1230</b>	X



**59dB**



**65dB**



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI  
 626/2011

9332938630

## Information sheet (Lot.10)

This information includes the results of calculation of the seasonal energy consumption and efficiency for air conditioner in regards to ErP pursuant to the Commission Regulation(EU) No.206/2012 and No.626/2011.

Information to identify the model(s) to which the information relates to:

TYPE : AIR CONDITIONER  
 : SINGLE SPLIT  
 : WALL MOUNTED  
 Indoor unit(s) : ASYG14LMCB  
 Outdoor unit : AOYG14LMCBN  
 BRAND : FUJITSU

N/A = Not Applicable

Function			
Cooling	Yes	Average	Yes
Heating	Yes	Warmer	No
		Colder	No

Design load				Seasonal efficiency			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Cooling	Pdesignc	4.2	kW	Cooling	SEER	7.10	-
Heating/Average	Pdesignh	4.5	kW	Heating/Average	SCOP/A	4.10	-
Heating/Warmer	Pdesignh	N/A	kW	Heating/Warmer	SCOP/W	N/A	-
Heating/Colder	Pdesignh	N/A	kW	Heating/Colder	SCOP/C	N/A	-

Cooling				Cooling			
Declared capacity for cooling, at indoor temperature 27 (19) °C and outdoor temperature Tj				Declared energy efficiency ratio, at indoor temperature 27 (19) °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = 35°C	Pdc	4.20	kW	Tj = 35°C	EER d	3.49	-
Tj = 30°C	Pdc	3.09	kW	Tj = 30°C	EER d	5.27	-
Tj = 25°C	Pdc	1.99	kW	Tj = 25°C	EER d	9.22	-
Tj = 20°C	Pdc	1.26	kW	Tj = 20°C	EER d	12.93	-

Heating/Average				Heating/Average			
Declared capacity for heating/Average season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Average season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = -7°C	Pdh	3.98	kW	Tj = -7°C	COPd	2.15	-
Tj = 2°C	Pdh	2.42	kW	Tj = 2°C	COPd	4.11	-
Tj = 7°C	Pdh	1.56	kW	Tj = 7°C	COPd	5.83	-
Tj = 12°C	Pdh	1.46	kW	Tj = 12°C	COPd	7.57	-
Tj = bivalent temperature	Pdh	4.50	kW	Tj = bivalent temperature	COPd	2.04	-
Tj = operating limit	Pdh	3.42	kW	Tj = operating limit	COPd	1.77	-

Heating/Warmer				Heating/Warmer			
Declared capacity for heating/Warmer season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Warmer season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = 2°C	Pdh	N/A	kW	Tj = 2°C	COPd	N/A	-
Tj = 7°C	Pdh	N/A	kW	Tj = 7°C	COPd	N/A	-
Tj = 12°C	Pdh	N/A	kW	Tj = 12°C	COPd	N/A	-
Tj = bivalent temperature	Pdh	N/A	kW	Tj = bivalent temperature	COPd	N/A	-
Tj = operating limit	Pdh	N/A	kW	Tj = operating limit	COPd	N/A	-

Heating/Colder				Heating/Colder			
Declared capacity for heating/Colder season, at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance/Colder season, at indoor temperature 20 °C and outdoor temperature Tj			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Tj = -7°C	Pdh	N/A	kW	Tj = -7°C	COPd	N/A	-
Tj = 2°C	Pdh	N/A	kW	Tj = 2°C	COPd	N/A	-
Tj = 7°C	Pdh	N/A	kW	Tj = 7°C	COP d	N/A	-
Tj = 12°C	Pdh	N/A	kW	Tj = 12°C	COP d	N/A	-
Tj = bivalent temperature	Pdh	N/A	kW	Tj = bivalent temperature	COP d	N/A	-
Tj = operating limit	Pdh	N/A	kW	Tj = operating limit	COP d	N/A	-
Tj=-15°C	Pdh	N/A	kW	Tj = -15°C	COP d	N/A	-

Bivalent temperature				Operating limit temperature			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Heating/Average	T <sub>biv</sub>	-10	°C	Heating/Average	T <sub>ol</sub>	-25	°C
Heating/Warmer	T <sub>biv</sub>	N/A	°C	Heating/Warmer	T <sub>ol</sub>	N/A	°C
Heating/Colder	T <sub>biv</sub>	N/A	°C	Heating/Colder	T <sub>ol</sub>	N/A	°C

Cycling interval capacity				Cycling interval efficiency			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
For cooling	P <sub>cycc</sub>	N/A	kW	For cooling	EER <sub>cycc</sub>	N/A	-
For heating	P <sub>cyhc</sub>	N/A	kW	For heating	COP <sub>cyhc</sub>	N/A	-
Degradation coefficient cooling	C <sub>dc</sub>	0.25	-	Degradation coefficient heating	C <sub>dh</sub>	0.25	-

Electric power input in power modes other than 'active mode'				Annual electricity consumption			
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Off mode (Cooling/Heating)	P <sub>OFF</sub>	6.0/6.0	W	Cooling	Q <sub>CE</sub>	208	kWh/a
Standby mode (Cooling/Heating)	P <sub>SB</sub>	6.0/6.0	W	Heating/Average	Q <sub>HE</sub>	1537	kWh/a
Thermostat-off mode (Cooling/Heating)	P <sub>TO</sub>	1.0/7.0	W	Heating/Warmer	Q <sub>HE</sub>	N/A	kWh/a
Crankcase heater mode (Cooling/Heating)	P <sub>CK</sub>	0.0/31.0	W	Heating/Colder	Q <sub>HE</sub>	N/A	kWh/a

Capacity control		Other items			
Item	Y/N	Item	Symbol	Value	Unit
Fixed	No	Sound power level (Indoor/Outdoor)	L <sub>WA</sub>	59.0/65.0	dB(A)
Staged	No	Global warming potential	GWPP	1975	kgCO <sub>2</sub> eq.
Variable	Yes	Rated air flow (Indoor/Outdoor)	-	770/2050	m <sup>3</sup> /h

Contact details for obtaining more information	FUJITSU GENERAL LIMITED 1116, Suenaga, Takatsu-ku, Kawasaki, 213-8502, Japan
--	---


V20121214





# ENERG


енергия · ενέργεια



## FUJITSU


AOYG14LMCBN/ASYG14LMCB

SEER

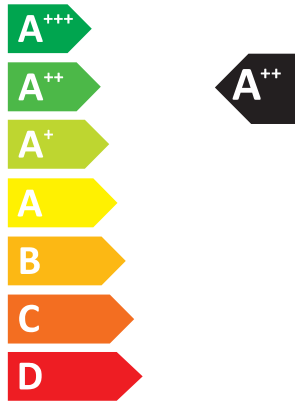

kW **4,2**  
SEER **7,1**  
kWh/annum **208**

SCOP

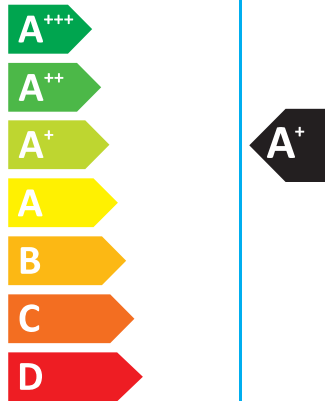

kW	X	4,5	X
SCOP	X	4,1	X
kWh/annum	X	1537	X



60dB



65dB



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI  
626/2011

9332938647